


Semi-Automatic Uniform 4 Edge Taper

Model:

PP-566EG

Fast, smooth tape sealing for uniform boxes.

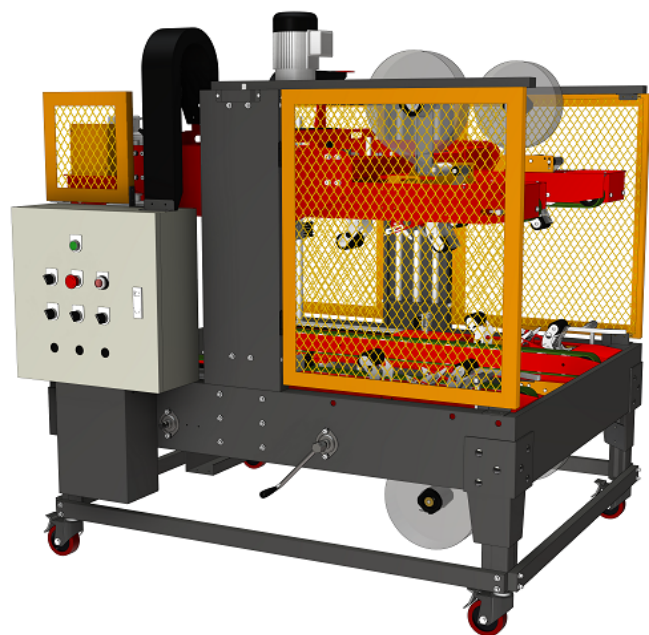


Features:

- Quick and easy adjustments
- New tape head allows smooth sealing and straight taping
- Four edges sealed and wiped at the same time - fast and smooth
- Width and height adjusts with crank handle
- Width and height memory function; suitable for uniform cartons
- PLC controlled electric system; can be controlled with infeed/outfeed equipment
- Tape overlap length 60+/-5mm
- 1 Year Limited Warranty

Specifications:

| | |
|-------------------|---|
| Power Supply | 3Ø, 220V, 380V, 415V, 440V |
| Tape (OPP) | 3" (W) x 0.05mm(t) x 1000y(L) x 76Ø(ID) |
| Capacity | 240 Cartons/Hr(60Hz), Regular mode (Machine resets each time) 360 Cartons/Hr(60Hz), Height/Width memory mode |
| Belt Speed | 20M/min. (60Hz) |
| Min. Sealing Size | 300mm L x 250mm W x 150mm H (11.8" L x 9.8" W x 5.9" H) |
| Max. Sealing Size | 700mm L x 500mm W x 500mm H (27.6" L x 19.7" W x 19.7" H) |
| Table Height | 670 - 830 mm (26.4 - 32.7 inches) |
| Machine Size | 1639mm L x 1630mm W x 1658-1818mm H (64.5" L x 64.2" W x 65.3"~71.6" H) |
| Air | 6Kgf/cm ² |
| Net Weight | 404Kgs (889 lbs) |
| Gross Weight | 504Kgs (1109 lbs) |
| Packaging Size | 1771mm L x 1762mm W x 1746mm H (69.7" x 69.4" x 68.7") |



Options:

- With or without infeed power roller conveyor
- With or without outfeed power roller conveyor
- Power-saving 60 second auto-stop
- Safety fence
- 2" or 2.5" tape adapter
- Detection for no tape
- Detection for sealing failure
- Detection for uncut tape

