

Tray sealer- *YTM (Manual)*






- ✓ Heat Sealing
- ✓ Replaceable tray
- ✓ Requires Air compressor
- ✓ Packed in wooden cases

◆ Model Description

Uses upper tooling to die cut around the tray for a nice, clean retail appearance.

Easy to use manual operation. Simply load tray/s into the cavity and push tooling forward into the seal area - remove when the cycle time is complete.

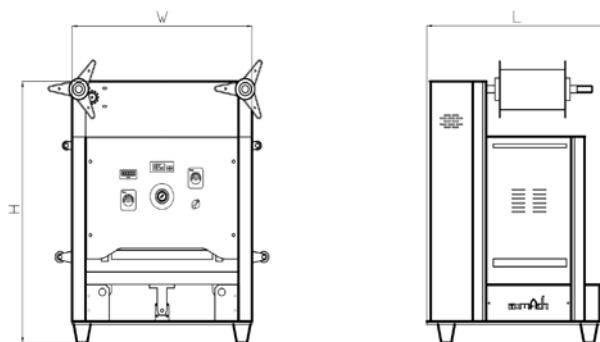

- Model: **YTM-300**
- Maximum tray height: 110mm (4.3)
- Maximum tray length×width:
sealing 1 at a time : 300×300 (11.8"×11.8")
sealing 2 at a time : 300×135 (11.8"×5.3")
sealing 4 at a time : 135×135 (5.3"×5.3")
- Cycle time: 6 seconds
- Voltage: AC220V/AC110V
- Machine dimensions:550×640×650 (22"×25"×26")
- Weight: ≈120kg (264 lbs)
- Max Film diameter : Φ220mm (8.7")
- Air pressure: 0.6~0.8Mpa (1 CFM @60 PSI)
- Total power: ≈1.8kw (1800 watts)

- Model: **YTM-400**
- Maximum tray height: 110mm (4.3")
- Maximum tray length×width:
sealing 1 at a time : 400×400 (15.7"×15.7")
sealing 2 at a time : 400×185 (15.7"×7.28")
sealing 4 at a time : 185×185 (7.28"×7.28")
- Cycle time: 6 seconds
- Voltage: AC220V/AC110V
- Machine dimensions:550×740×650 (22"×29"×26")
- Weight: ≈150kg (330 lbs)
- Max Film diameter : Φ220mm (8.7")
- Air pressure: 0.6~0.8Mpa (1 CFM @60 PSI)
- Total power: ≈2.0kw (2000 watts)

Configuration	Model:YTM-300	Model:YTM-400
PLC:	MITSUBISHI FX2N	
Pneumatic accessories:	Airtac	
Main body material:	304 stainless steel	
Mold material:	6061 aluminum	
Electrical accessories	Schneider	
Thermostat	MH-PT100	