

Tray sealer- *YTA (Automatic)*





- ✓ Heat sealing
- ✓ Replaceable tray
- ✓ Air compressor required
- ✓ Packed in wooden cases

◆ Model Description

Uses upper tooling to die cut around the tray for a nice, clean retail appearance.

Easy to use automatic operation. Simply load the tray into the tooling and a sensor will activate the tooling to move inward and automatically seal the trays then return to home position for operator to remove the tray.

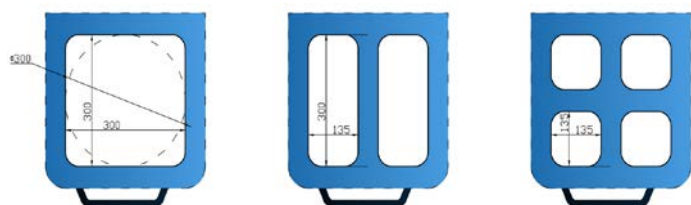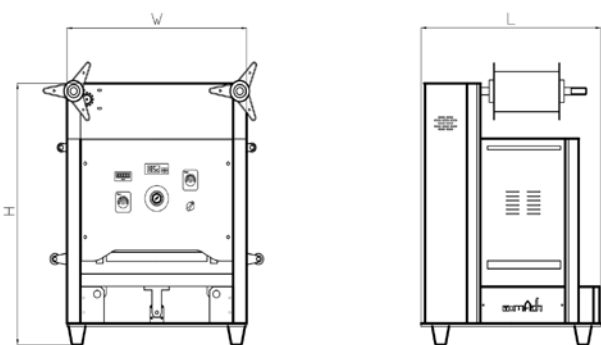

- Model: **YTA-300**
- Maximum tray height: 110mm
- Maximum tray length×width:
sealing 1 at a time: 300×300 (11.8"x11.8")
sealing 2 at a time: 300×135 (11.8"x5.3")
sealing 4 at a time: 135×135 (5.3"x5.3")
- Cycle time: 6 seconds
- Voltage: AC220V/AC110V
- Machine dimensions:550×640×650 (22"x25"x26")
- Weight : ≈120kg (264 lbs)
- Max Film diameter : Φ220mm (8.7")
- Air pressure: 0.6~0.8Mpa (1 CFM @60 PSI)
- Total power: ≈1.8kw (1800 watts)



- Model: **YTA-400**
- Maximum tray height: 110mm
- Maximum tray length×width:
sealing 1 at a time: 400×400 (15.7"x15.7")
sealing 2 at a time: 400×185 (15.7"x7.28")
sealing 4 at a time: 185×185 (7.28"x7.28")
- Cycle time: 6 seconds
- Voltage: AC220V/AC110V
- Machine dimensions:550×740×650 (22"x29"x26")
- Weight : ≈150kg (330 lbs)
- Max Film diameter : Φ220mm (8.7")
- Air pressure: 0.6~0.8Mpa (1 CFM @60 PSI)
- Total power: ≈2.0kw (2000 watts)

Configuration	Model:YTA-300	Model:YTA-400
PLC:	MITSUBISHI FX2N	
Pneumatic accessories:	Airtac	
Main body material:	304 stainless steel	
Mold material:	6061 aluminum	
Electrical accessories	Schneider	
Thermostat	MH-PT100	